



SECTION A-A

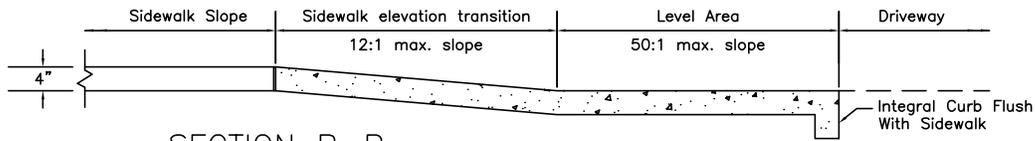

SECTION B-B

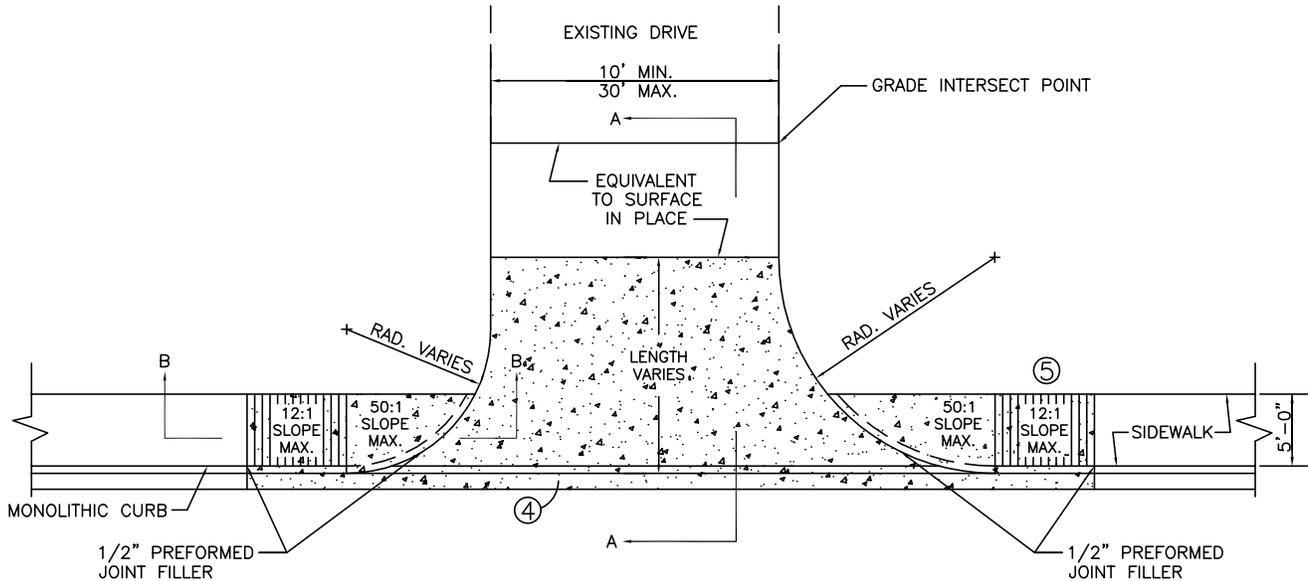

CONCRETE DRIVE

- NOTES: ① All exposed edges shall be rounded with a 1/4" radius tool.
 ② Subgrade for Drive Approach shall be a minimum of 2" thick of either "B" Borrow or No. 53 Crushed Stone and mechanically compacted.
 ③ Additional contraction joints may be required depending on drive width.
 ④ Depressed Curb & Gutter through Drive to be paid as 6" Curb & Gutter.
 ⑤ Curb Ramps shall be paid for as part of Drive.
 ⑥ The cost of the Drive Approach shall include all of the above items, unless otherwise noted.

PAVEMENT OPTIONS		
TRUCK TRAFFIC CLASSIFICATION	BITUMINOUS - HOT MIX ASPHALT (HMA)	CONCRETE, CLASS A
LIGHT (<50/DAY)	1.5" SURFACE, TYPE A 2.5" INTERMEDIATE 8" COMP. #53s, BASE	8" P.C.C.P. 6" TYPE "O" #53s (DENSE GRADED)
MEDIUM (50-499/DAY)	1.5" SURFACE, TYPE B 2.5" INTERMEDIATE, TYPE B 8" BASE, TYPE B 6" COMP. #53s, BASE	9" P.C.C.P. 6" TYPE "O" #53s (DENSE GRADED)
HEAVY (>500/DAY)	1.5" SURFACE, TYPE C 2.5" INTERMEDIATE, TYPE C 10" BASE, TYPE C 6" COMP. #53s, BASE	10" P.C.C.P. 6" TYPE "O" #53s (DENSE GRADED)

DETAIL D-5
 Commercial Concrete Drive Approach
 No Scale (Rev. Date 5/16/07)