INDIANA DEPARTMENT OF TRANSPORTATION



ROAD PLANS

PROJECT NO. 1801726 P.E. 1801726 R/W

Reconstruction of 1.26-mile of roadway and approximetly 1.26-miles of a 10-foot multi-use trail. Road construction begining at the intersection of Walnut Street and MLK Jr. Blvd., and ending at the intersection of Walnut Street and US 41. Trail construction beginning at the intersection of Walnut Street and MLK Jr. Blvd, and ending at the intersection of Walnut Street and US 41, In Sections 30-29 and 28, T6S, R10W in Knight Twp., City of Evansville, Vanderburgh County, Indiana.



BRIDGE LENGTH: ROADWAY LENGTH: 1.26 1.26 MT TOTAL LENGTH: MT. HIIC 14: 05140202010030

PROJECT LOCATION SHOWN BY

BEGINNING LATITUDE: 37° 58' 18" LONGITUDE: 87° 33' 59" LATITUDE: 37° 58' 25" ENDING LONGITUDE: 87° 32' 39"

TRAFFIC DATA

DESIGN DATA

END PROJECT DES 1801726 Sta. 100+53.28 "A"

LOCATION MAP

PIGEON TWP. Bayard Park Dr

SECTIONS 30-29-28, T-6-S, R-10-W CITY, EVANSVILLE TWP. KNIGHT & PIGEON COUNTY, VANDERBURGH STATE, INDIANA

INDIANA DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS DATED 2020 TO BE USED WITH THESE PLANS



| PLANS PREPARED BY: | LOCHMUELLER GROUP, INC. 6200 Vogel Road, Evansville, IN 47715 | (812) 479-6200 PHONE NUMBER |
|--------------------------|--|--------------------------------|
| CERTIFIED BY: | | // DATE |
| APPROVED FOR LETTING: | | |
| | INDIANA DEPARTMENT OF TRANSPORTATION | DATE |

N/A DESIGNATIO 1801726 SHEETS


Preliminary


BEGIN PROJECT DES 1801726

Sta. 34+00.00 "A"



Plans Prepared By: LOCHMUELLER GROUP 6200 Vogel Road Evansville, Indiana 47715 Phone: 812.479.6200 Toll Free: 800.423.7411

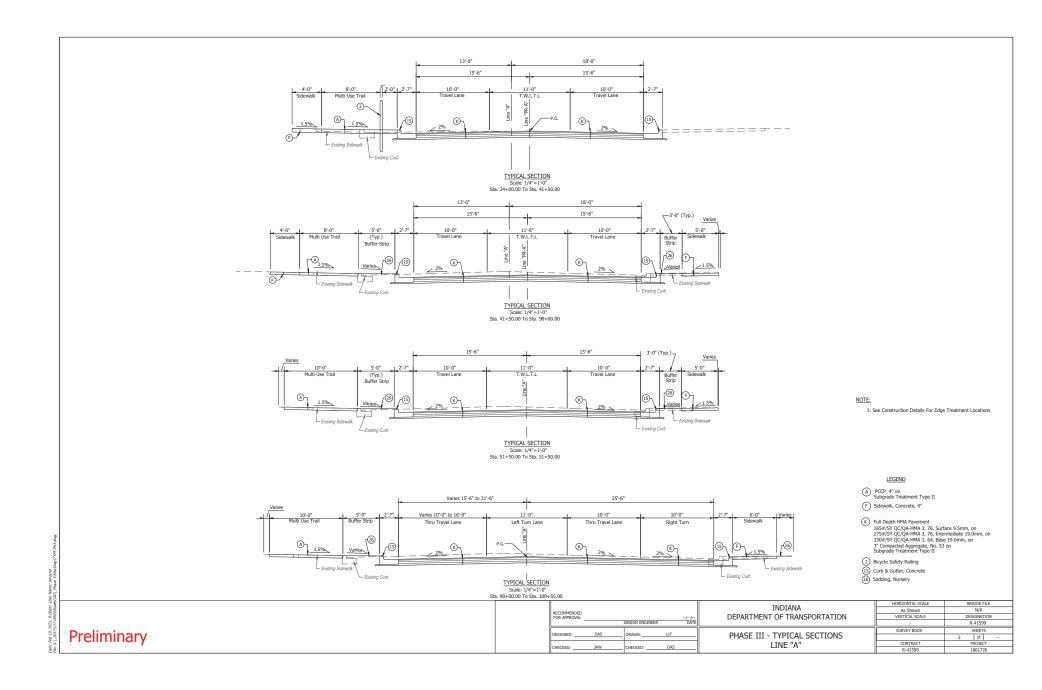

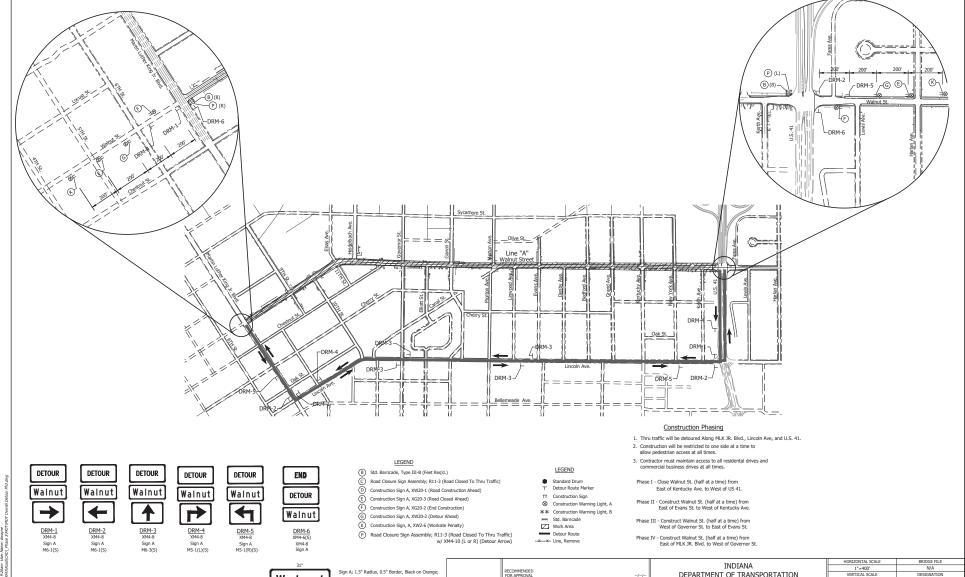

DESIGNATIO 1801726 SHEETS of

R-41599

DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC

DETOUR

Sign A; 1.5" Radius, 0.5" Border, Black on Orange;


W a I n u t 3.2 8.8 13.6 16.4 21.2 25.5

[Walnut] 6" C Series: Table of letter and object lefts.

Walnut

Sign A Detour Route Marker

Preliminary

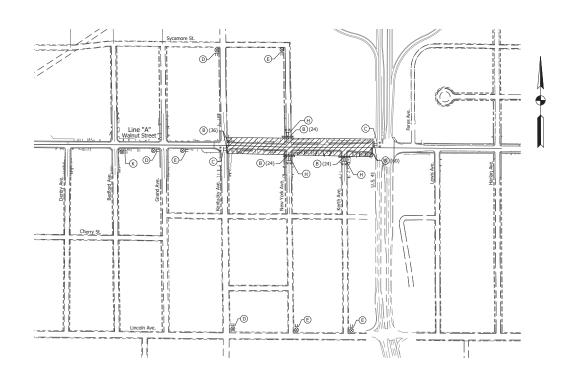

PHASE I Sta. 90+50 to Sta. 101+00 "A"

- 1. Construct Walnut St. (half at a time) from East of Kentucky Ave. to West of US 41.
- Construct New York St. half at a time.
- 3. Construct Kerth Ave. half at a time. 4. All sign locations are approximate and shall be verified by contractor.
- 5. Maintain access to all drives and business.

LEGEND

- B Std. Barricade, Type III-B (Feet Reg'd.)
 C Road Closure Sign Assembly; R11-3 (Road Closed To Thru Traffic)
 D Construction Sign A, XW20-1 (Road Construction Ahead)
- Construction Sign A, XG20-3 (Road Closed Ahead)
 Construction Sign A, XG20-2 (End Construction)
- Construction Sign A, XW20-2 (Detour Ahead)
 Road Closure Sign Assembly; R11-2 (Road Closed)
 Construction Sign, A, XW2-6 (Worksite Penalty)

- P Road Closure Sign Assembly; R11-3 (Road Closed To Thru Traffic) w/ XM4-10 (L or R) (Detour Arrow)


LEGEND

- Standard Drum
 Detour Route Marker
- TT Construction Sign
- Construction Warning Light, A
- ** Construction Warning Light, B
- Std. Barricade

 Work Area

-x-x- Line, Remove

| | RECOMMENDED FOR APPROVAL | -/-/- | INDIANA DEPARTMENT OF TRANSPORTATION | 1"=200' VERTICAL SCALE | N/A DESIGNATION |
|--------------|-----------------------------|----------------------|--------------------------------------|---------------------------|--------------------|
| | | DESIGN ENGINEER DATE | | - | 1801726 |
| Duelinginger | DECEMBED. DAS | DOMESTIC LIE | MAINTENANCE OF TRAFFIC | SURVEY BOOK | SHEETS |
| Preliminary | DESIGNED: DAG | DRAWN: LEF | | R-41599 | 14 of |
| 110 | CUECUED. 14M | CHECKED: DAS | PHASE I | CONTRACT | PROJECT |
| | CHECKED: JANA | CHECKED: DAG | | R-41599 | 1801726 |

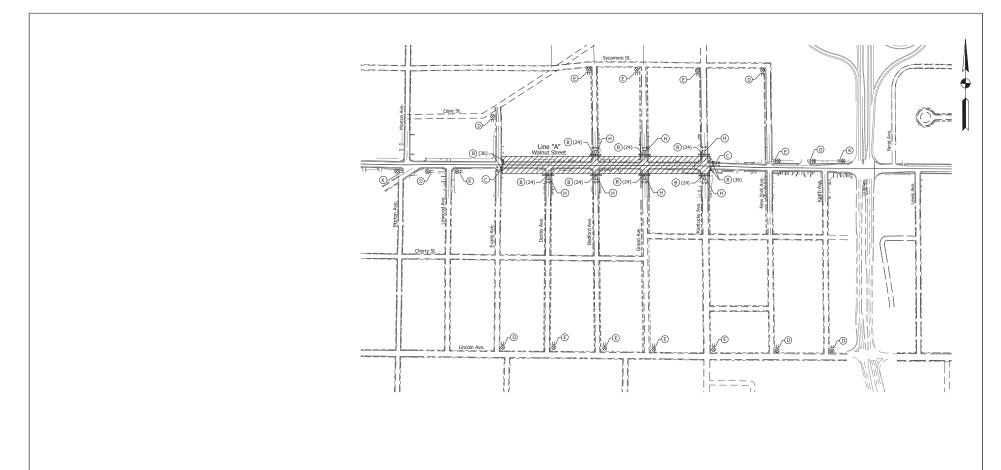

PHASE II Sta. 76+40 to Sta. 90+50 "A"

- 1. Construct Walnut St. (half at a time) from East of Evans St. to West of Kentucky Ave.
- 2. Construct Denby St. half at a time.
- Construct Bedford Ave. half at a time.
- 4. Construct Grand Ave. half at a time.
- 5. All sign locations are approximate and shall be verified by contractor.
- 6. Maintain access to all drives and business.

LEGEND

- (B) Std. Barricade, Type III-B (Feet Req'd.)
 (C) Road Closure Sign Assembly; R11-3 (Road Closed To Thru Traffic)
 (D) Construction Sign A, XW20-1 (Road Construction Ahead)
- Construction Sign A, XG20-3 (Road Closed Ahead)
 Construction Sign A, XG20-2 (End Construction)
- Construction Sign A, XW20-2 (Detour Ahead)
 Road Closure Sign Assembly; R11-2 (Road Closed)
 Construction Sign, A, XW2-6 (Worksite Penalty)


- P Road Closure Sign Assembly; R11-3 (Road Closed To Thru Traffic) w/ XM4-10 (L or R) (Detour Arrow)

LEGEND

- Standard Drum
 Detour Route Marker
- TT Construction Sign
- Construction Warning Light, A
- ** Construction Warning Light, B ■ Std. Barricade
- Work Area

-x--x- Line, Remove

| | RECOMMENDED FOR APPROVAL | DESIGN ENGINEER | // DATE | INDIANA DEPARTMENT OF TRANSPORTATION | HORIZONTAL SCALE 1"=200' VERTICAL SCALE | BRIDGE FILE N/A DESIGNATION 1801726 |
|-------------|----------------------------|-------------------------|------------|---|---|-------------------------------------|
| Preliminary | DESIGNED: DAS CHECKED: JAW | DRAWN: LLF CHECKED: DAS | | MAINTENANCE OF TRAFFIC PHASE II | SURVEY BOOK R-41599 CONTRACT R-41599 | SHEETS 15 |

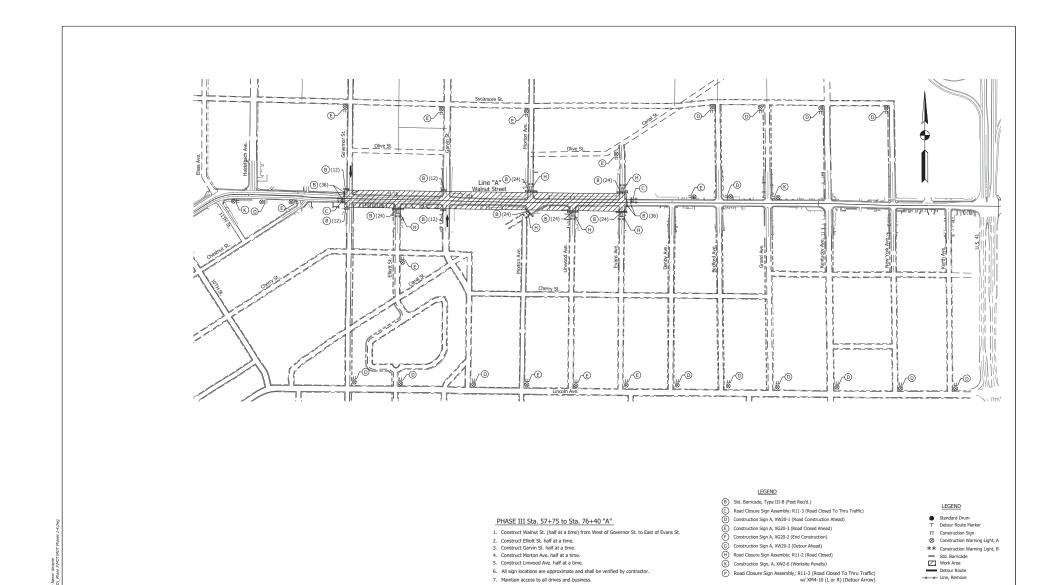

Preliminary

BRIDGE FILE N/A

DESIGNATIO 1801726 SHEETS of

1"=200' /ERTICAL SCAL


R-41599

INDIANA


DEPARTMENT OF TRANSPORTATION

MAINTENANCE OF TRAFFIC


PHASE III

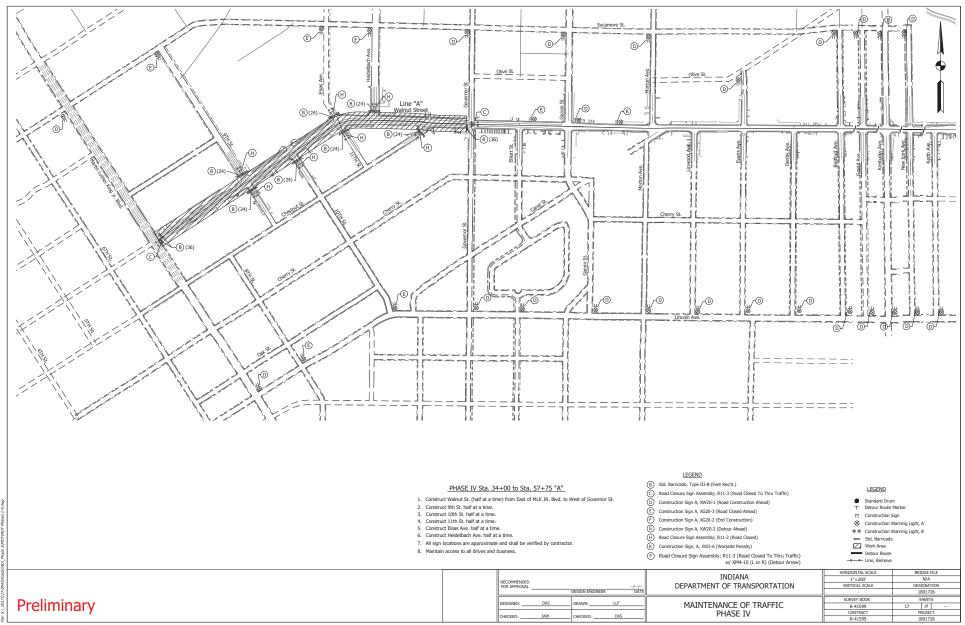


Date: Feb 19, 2021, 9:28am User Name: dwayne

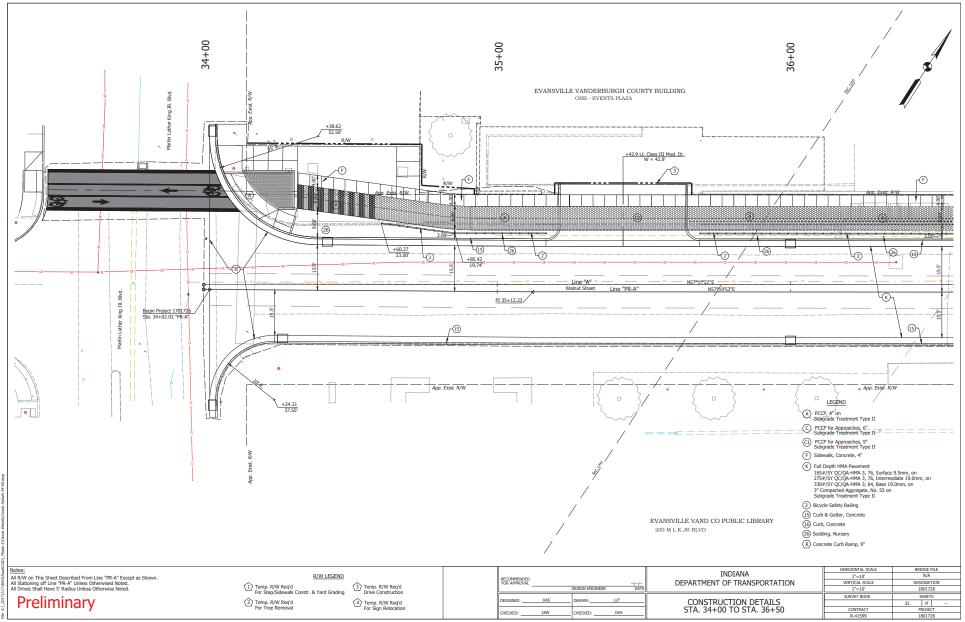



5, 2021, 3:31pm User Name: dwayne 7,117-00491pmellCADI Dhana 31Chinth Dulaibi Country

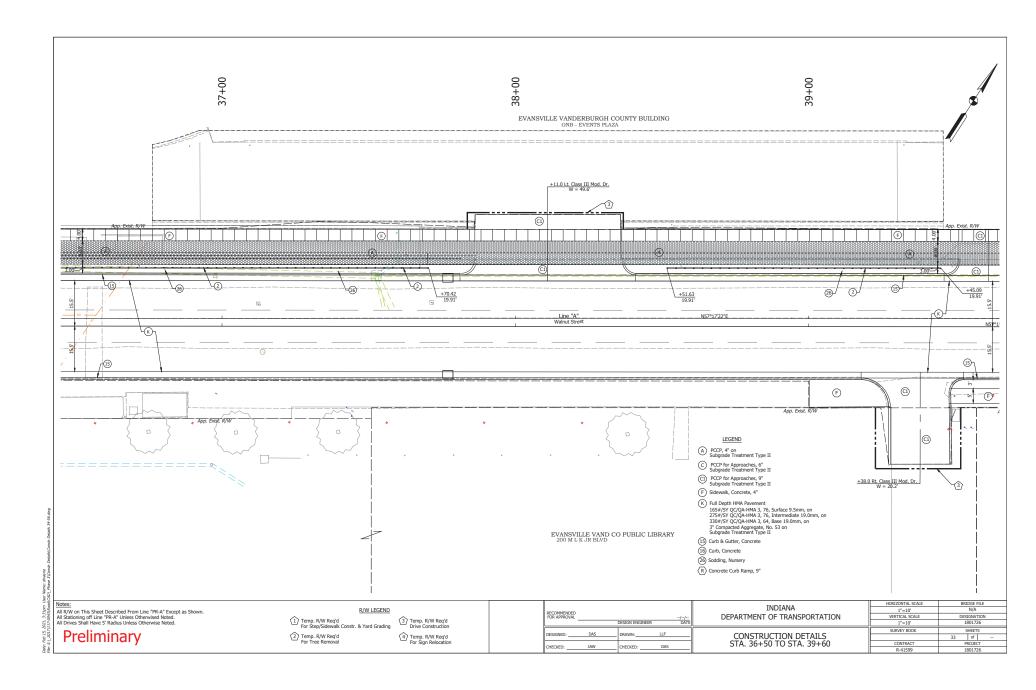



21, 3:32pm User Name: dwayne 17-0043|Road|CAD|_Phase 3|Constr Details 3-

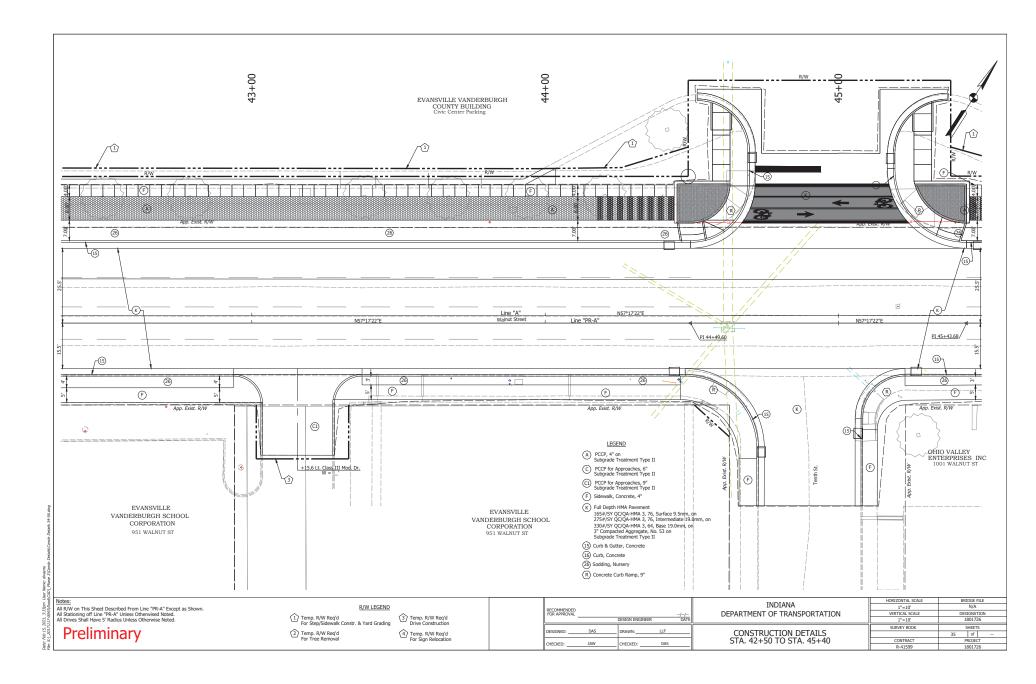


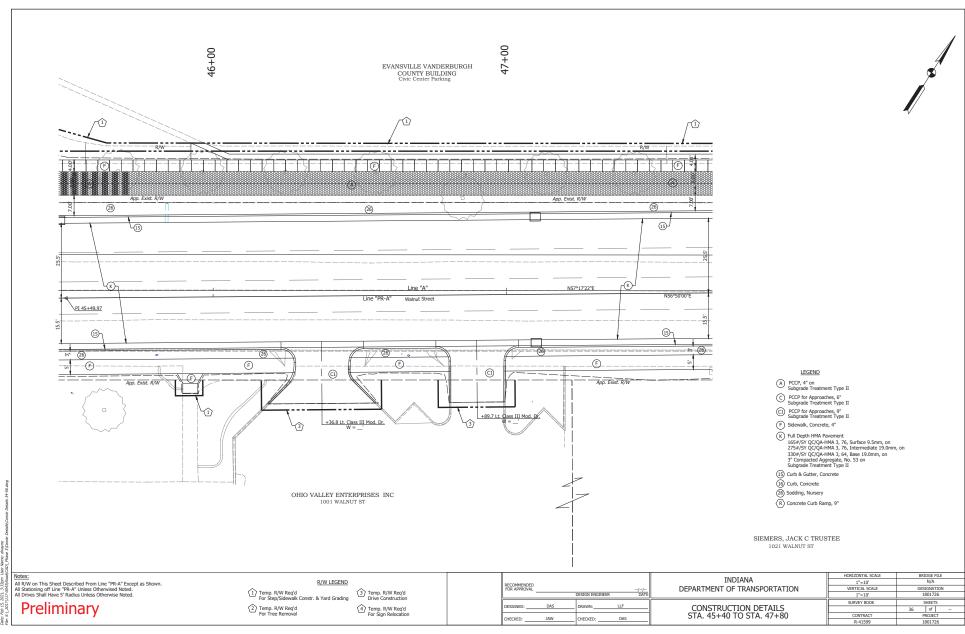


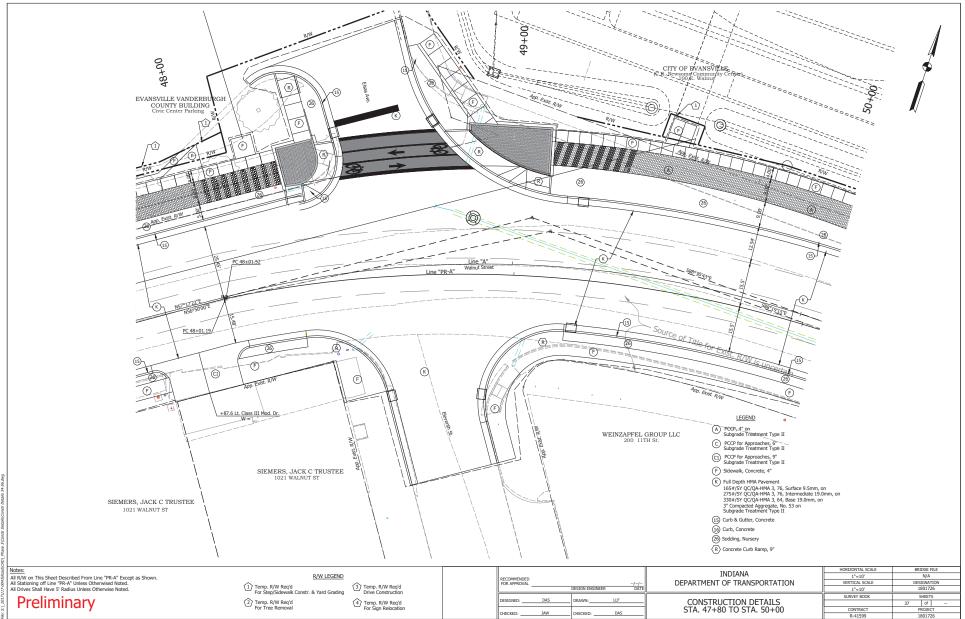


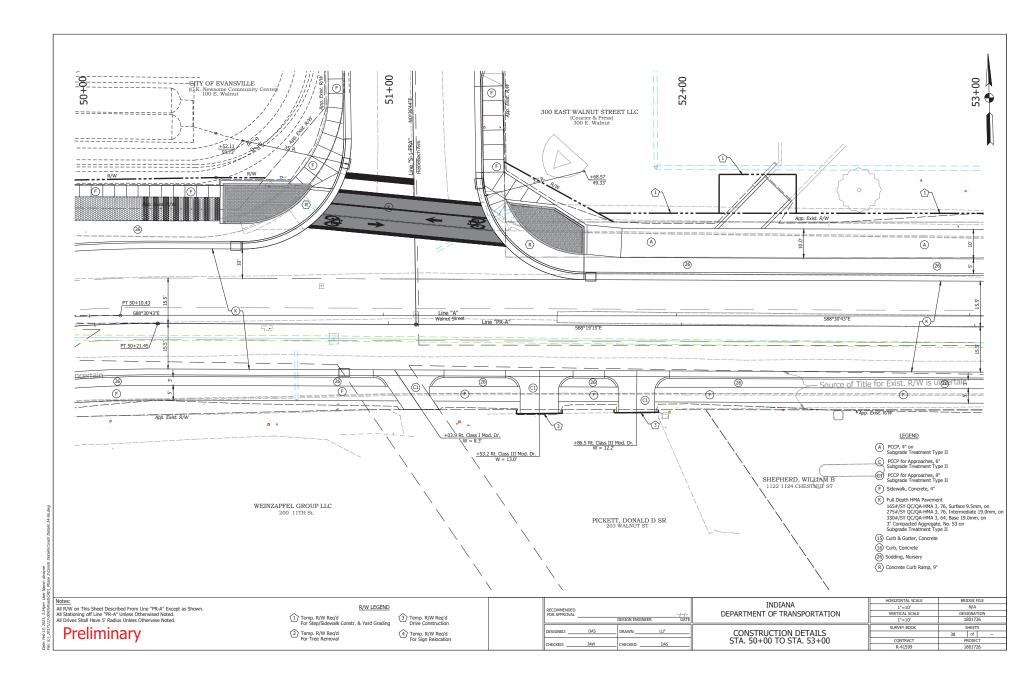

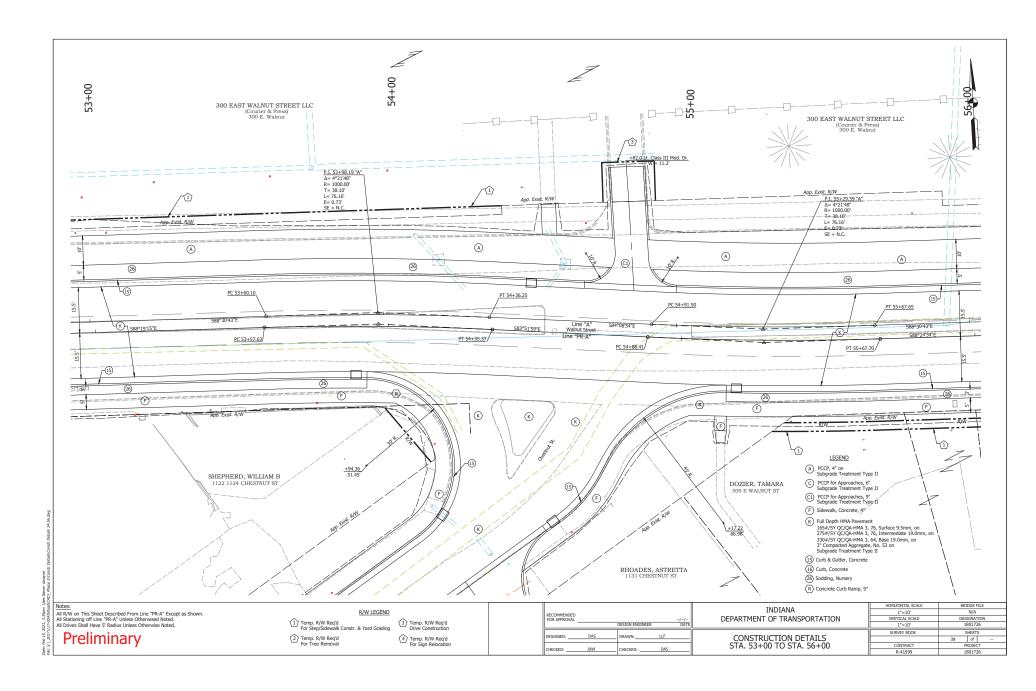


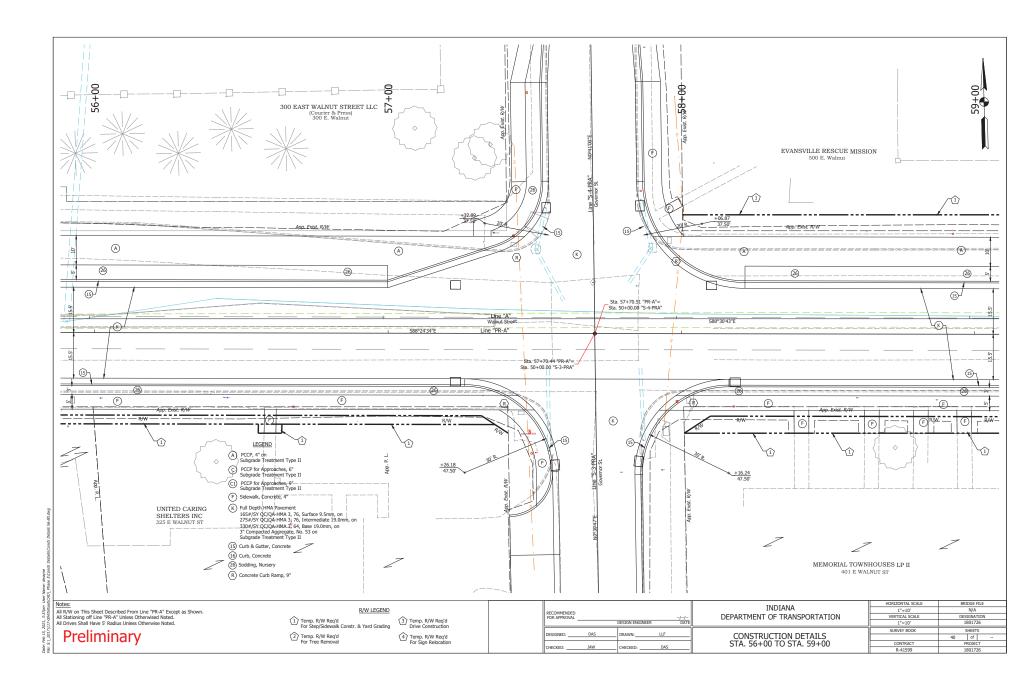


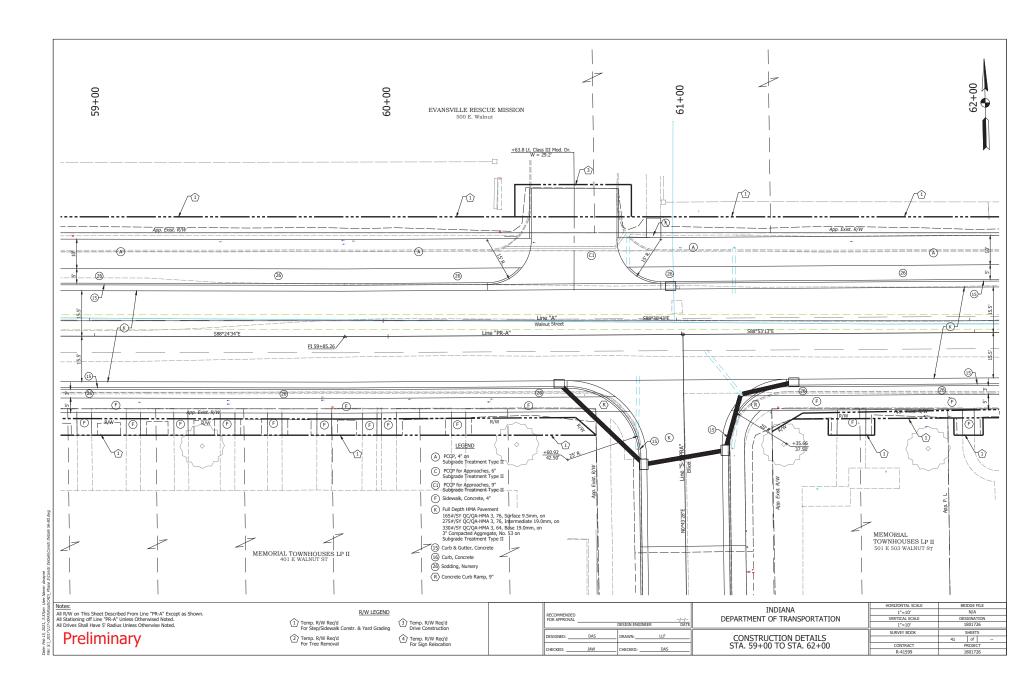


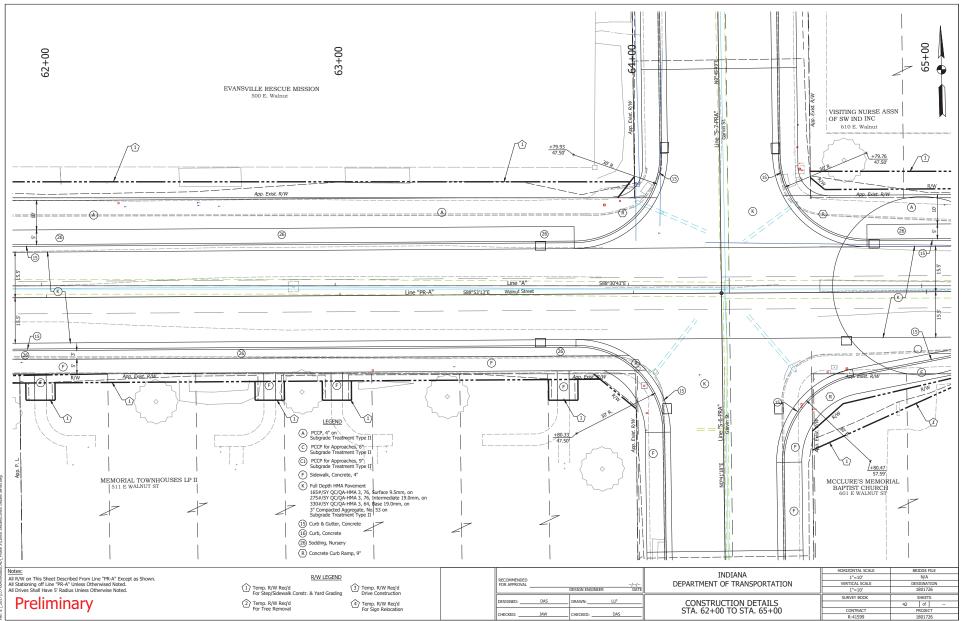



21, 3:30pm User Name: dwayne 7-00431Road(C4D) Phase 31Constr Defalls(Cons

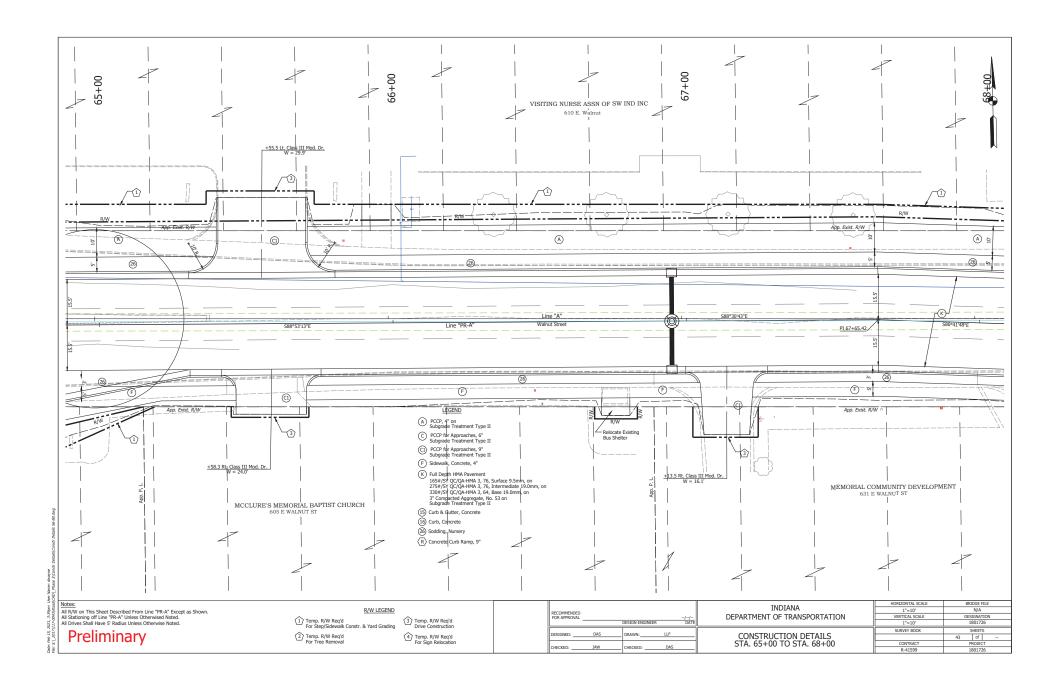


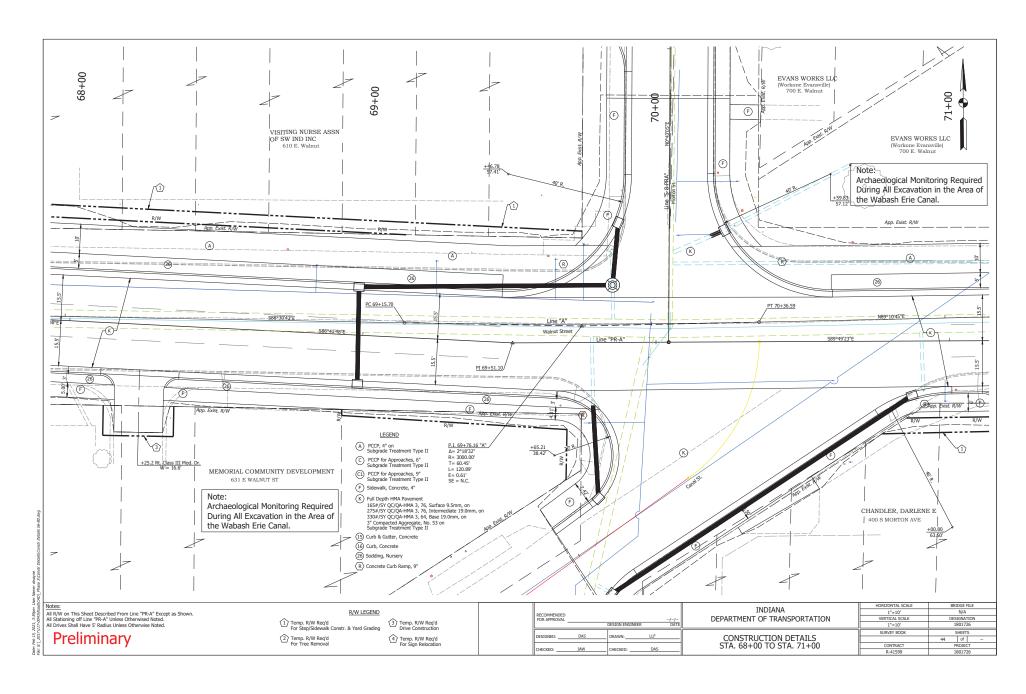


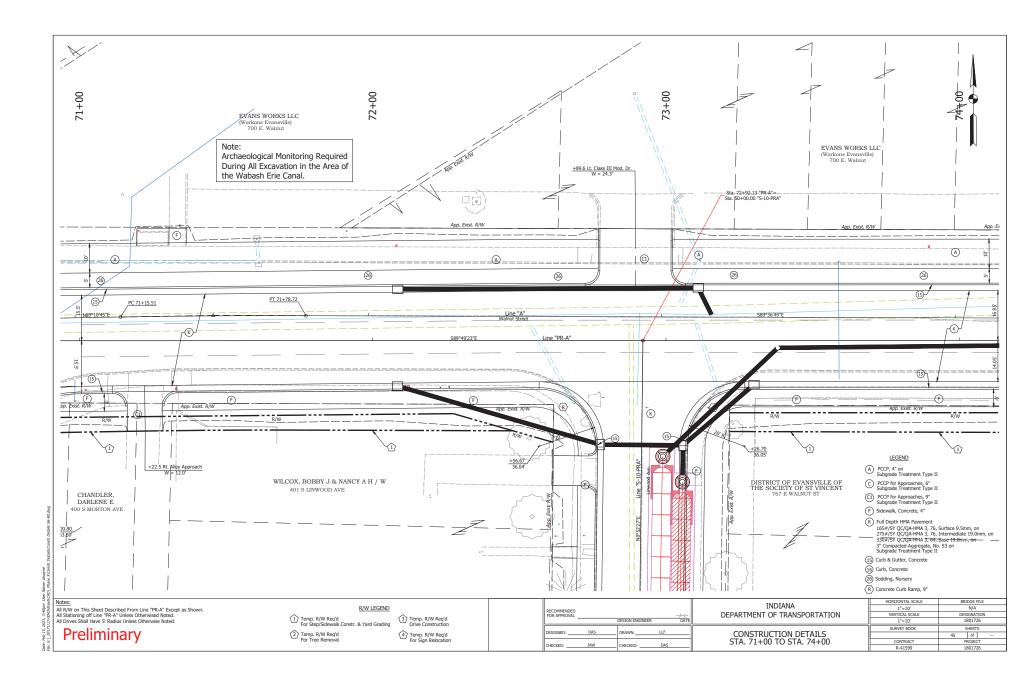


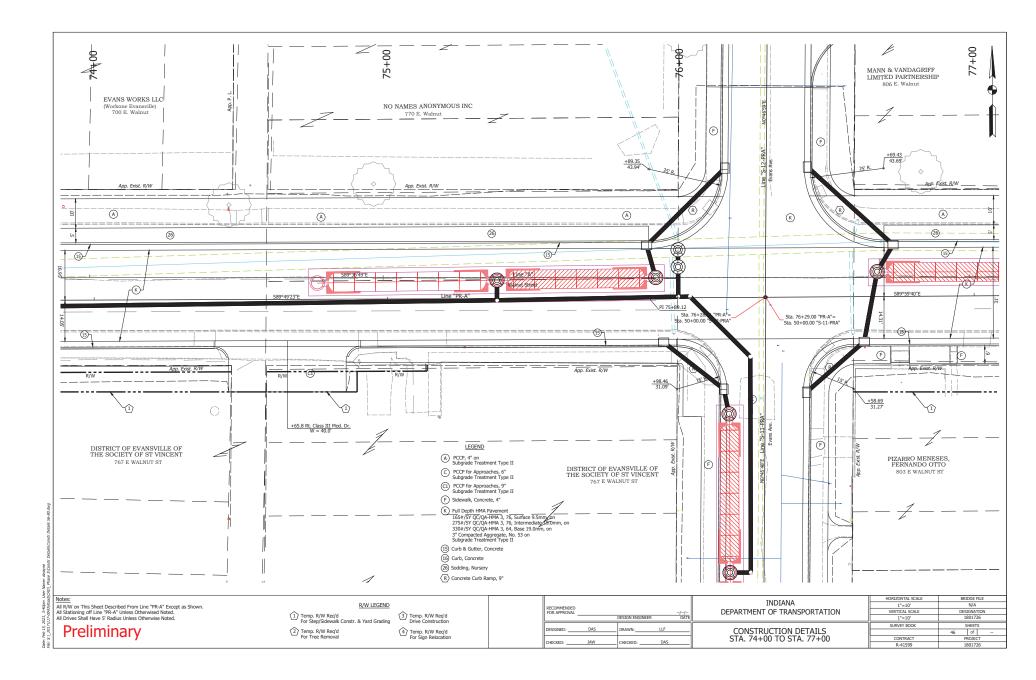

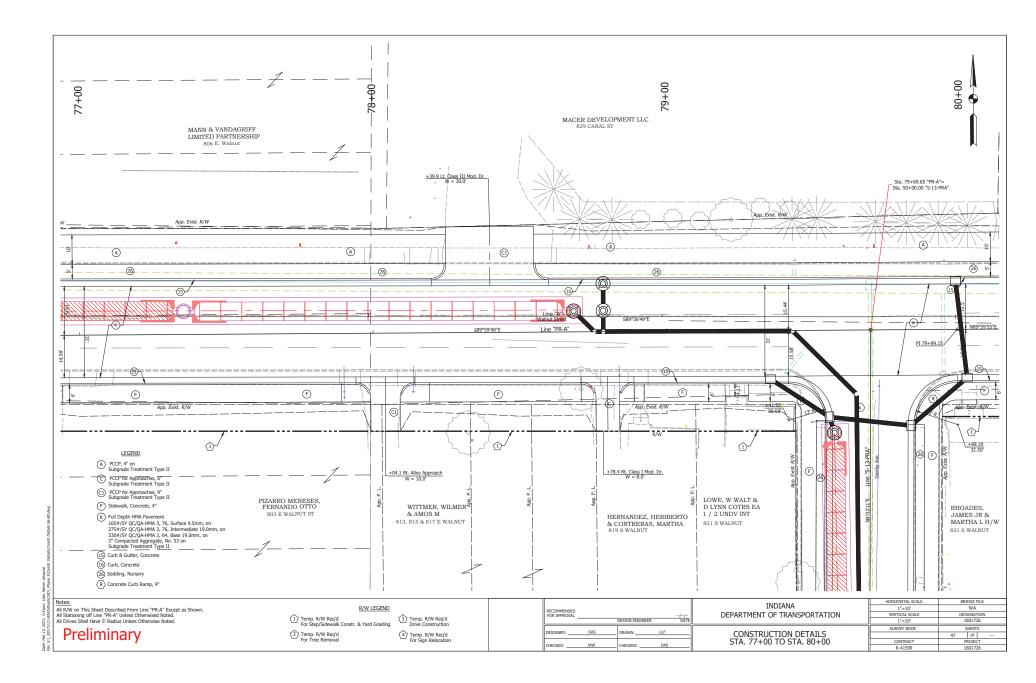


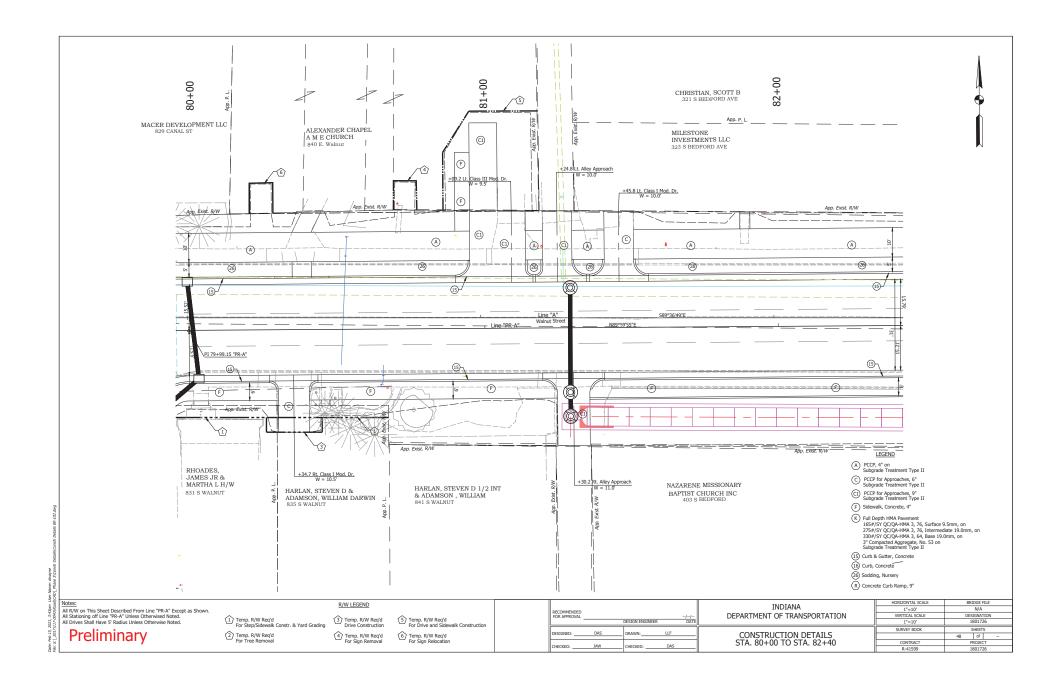


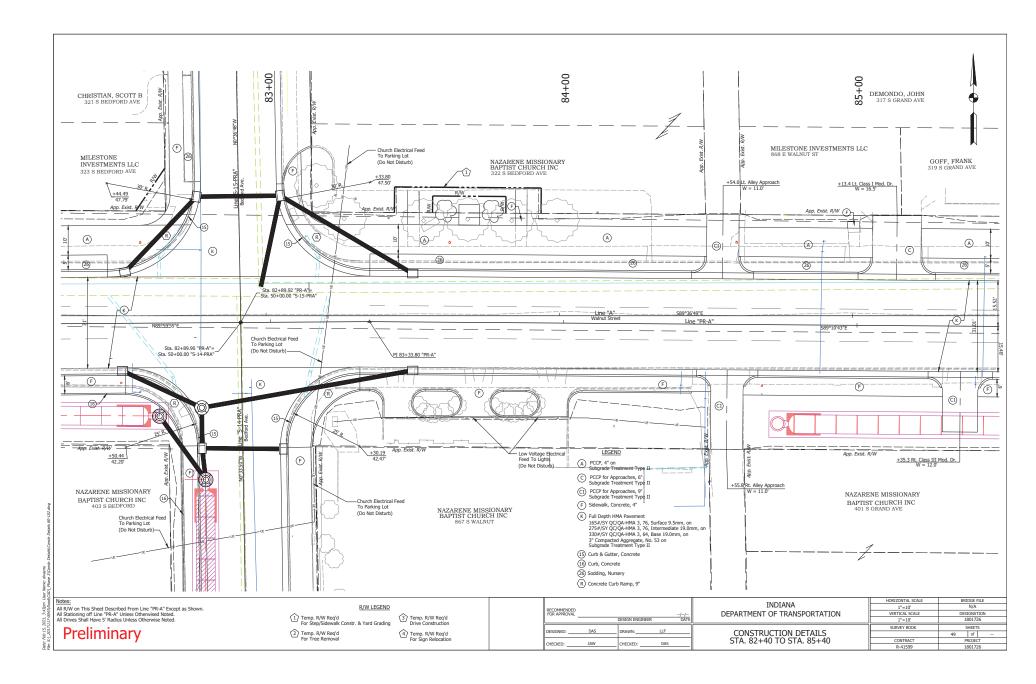


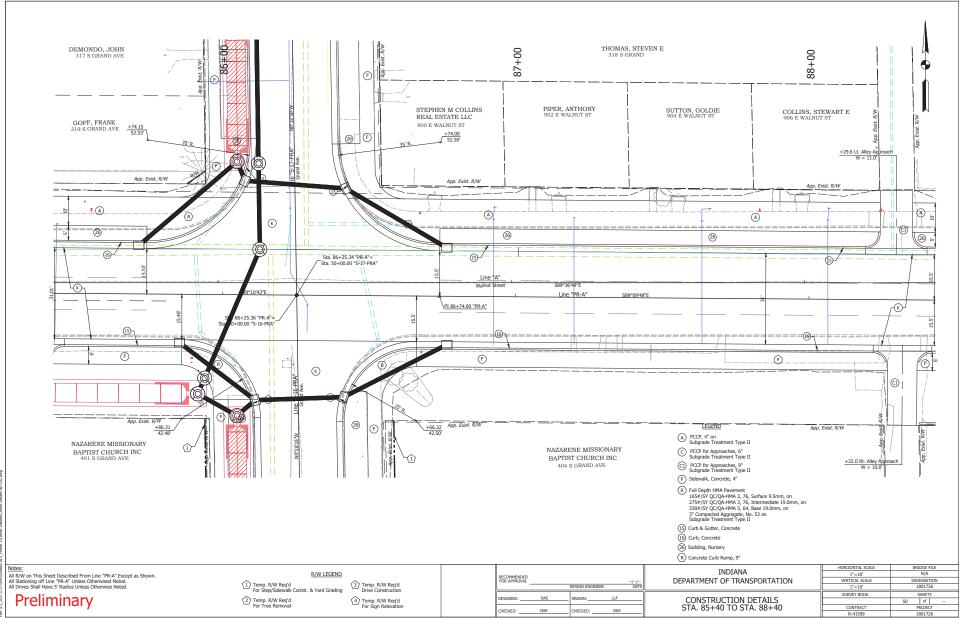


i, 2021, 3:44pm. User Name: dwayne 7117-0043|Road|C4D| Phase 3|Const: Detaik|Const: Detai

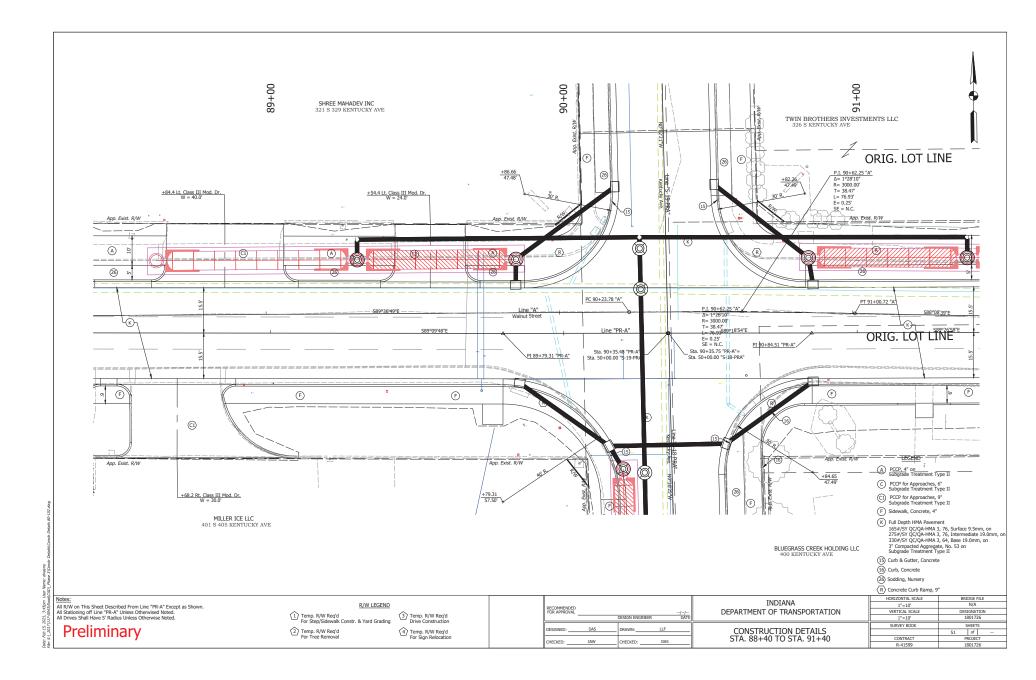

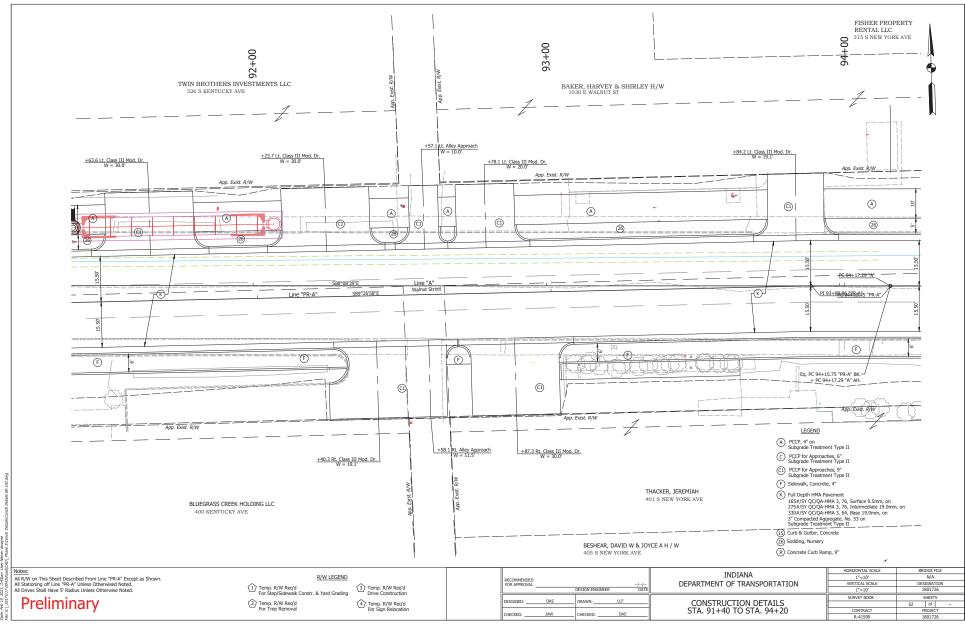

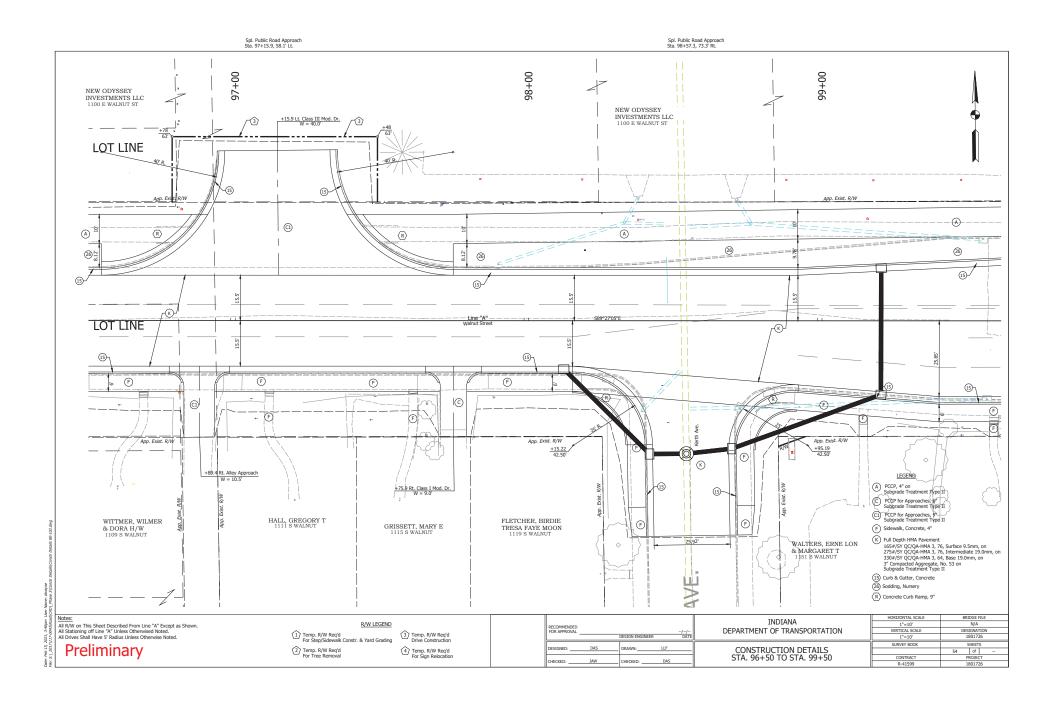

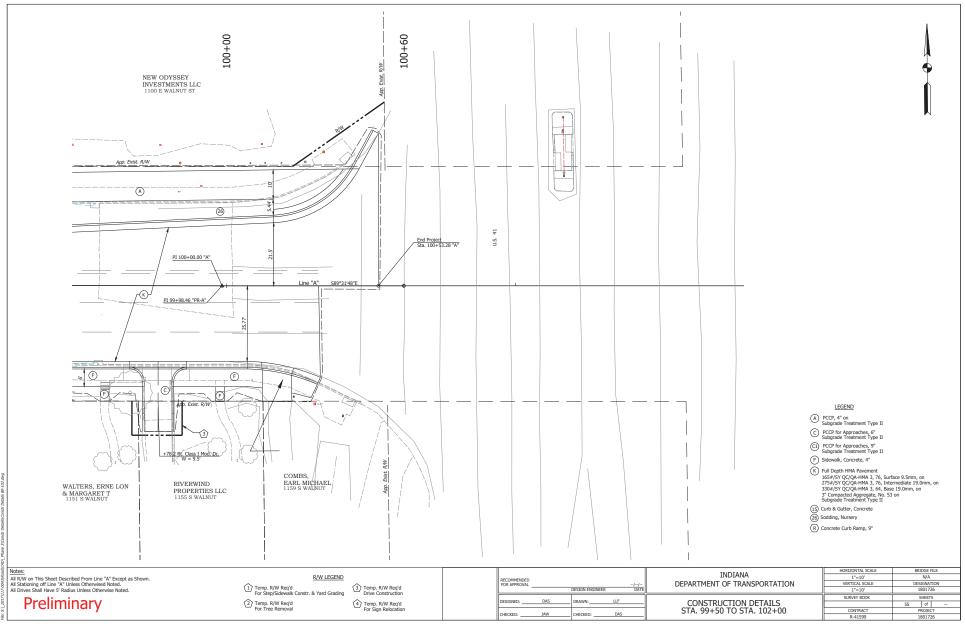

22, 3:47pm User Name: dwayne 17-00431Road(C4D). Phase 3[Constr. Details]Coss