



# JOINT SEALS

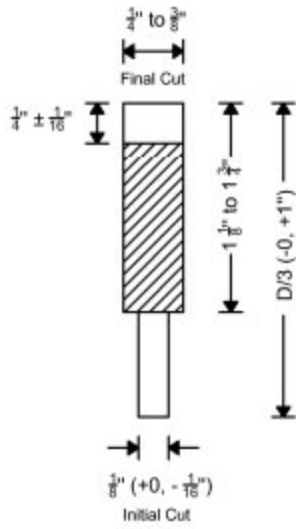

PREFORMED ELASTOMERIC SEAL

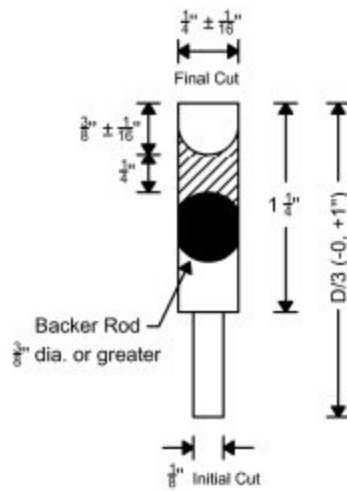


SILICONE JOINT SEALANT

## NOTES

1. Transverse joints shall be constructed perpendicular to the centerline with a maximum spacing of 18' unless otherwise specified.
2. The configuration of the preformed elastomeric joint seal shall be a  $\frac{9}{16}$ " to  $\frac{5}{8}$ " wide seal with at least a five cell internal design. The seal height shall be  $\frac{9}{16}$ " to  $\frac{13}{16}$ " in uncompressed stage.
3. For transverse construction joints, the initial saw cut may be eliminated.

## TYPE D-1 SAWED CONTRACTION JOINT SEALANT OPTIONS

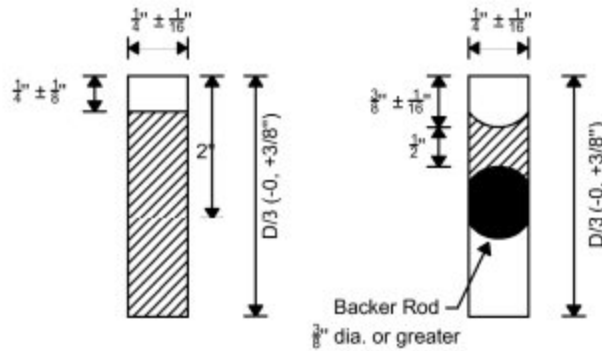

HOT POURED JOINT SEALANT

SILICONE JOINT SEALANT

## SAWED LONGITUDINAL JOINT SEALANT OPTIONS



# DETAIL CP-3

## CONCRETE PAVEMENT - JOINT SEALS

NO SCALE

REVISION DATE: DRAFT - UPDATED 5-2-18

## REFERENCE

1. See Detail CP-1 for Concrete Pavement General Notes
2. See Detail CP-2 for Concrete Pavement Patch- Dowel/Tie Bars
3. See Section ??? - Concrete Pavement Specifications